SAVE THIS SCHEMATIC DIAGRAM FOR LATER SERVICE

RUN NO. 3

MODEL JB-1201M(A)
SCHEMATIC DIAGRAM

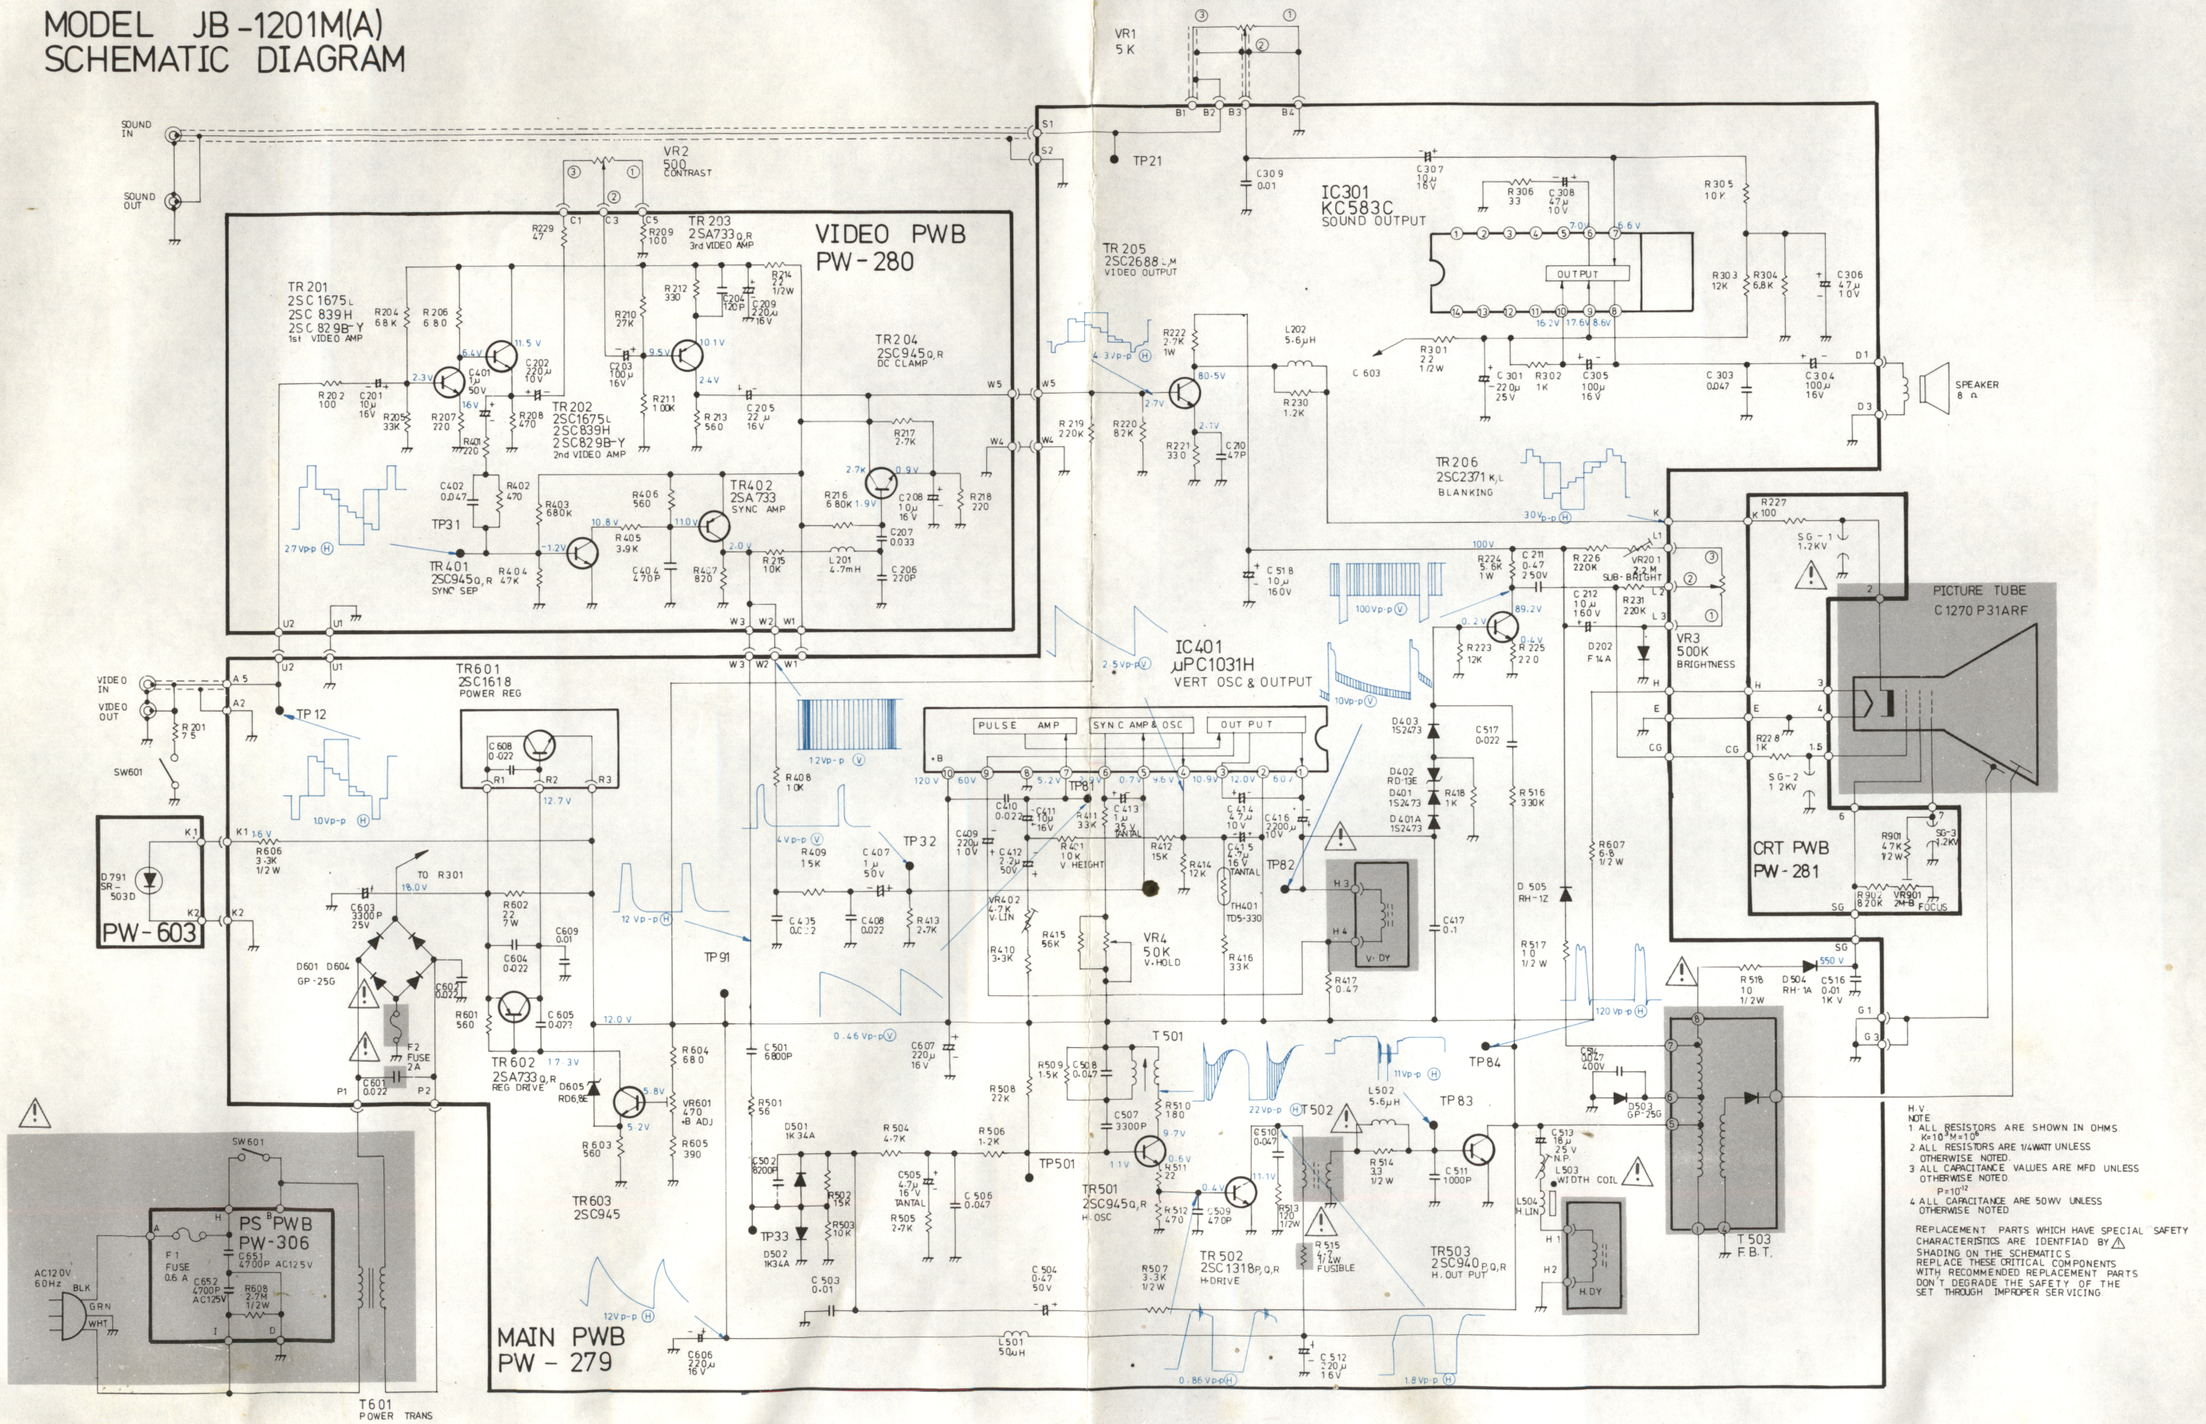

H.V NOTE:
1. ALL RESISTORS ARE SHOWN IN OHMS K=10^3 M=10^6
2. ALL RESISTORS ARE 1/4WATT UNLESS OTHERWISE NOTED.
3. ALL CAPACITANCE VALUES ARE MFD UNLESS OTHERWISE NOTED. P=10^{-12}
4. ALL CAPACITANCE ARE 50WV UNLESS OTHERWISE NOTED

REPLACEMENT PARTS WHICH HAVE SPECIAL SAFETY CHARACTERISTICS ARE IDENTFIAD BY ⚠
SHADING ON THE SCHEMATIC'S.
REPLACE THESE CRITICAL COMPONENTS WITH RECOMMENDED REPLACEMENT PARTS DON'T DEGRADE THE SAFETY OF THE SET THROUGH IMPROPER SERVICING.

JB-1201M(A)
78069633

THIS SCHEMATIC DIAGRAM IS FUNDAMENTAL AND SUBJECT TO CHANGE.